



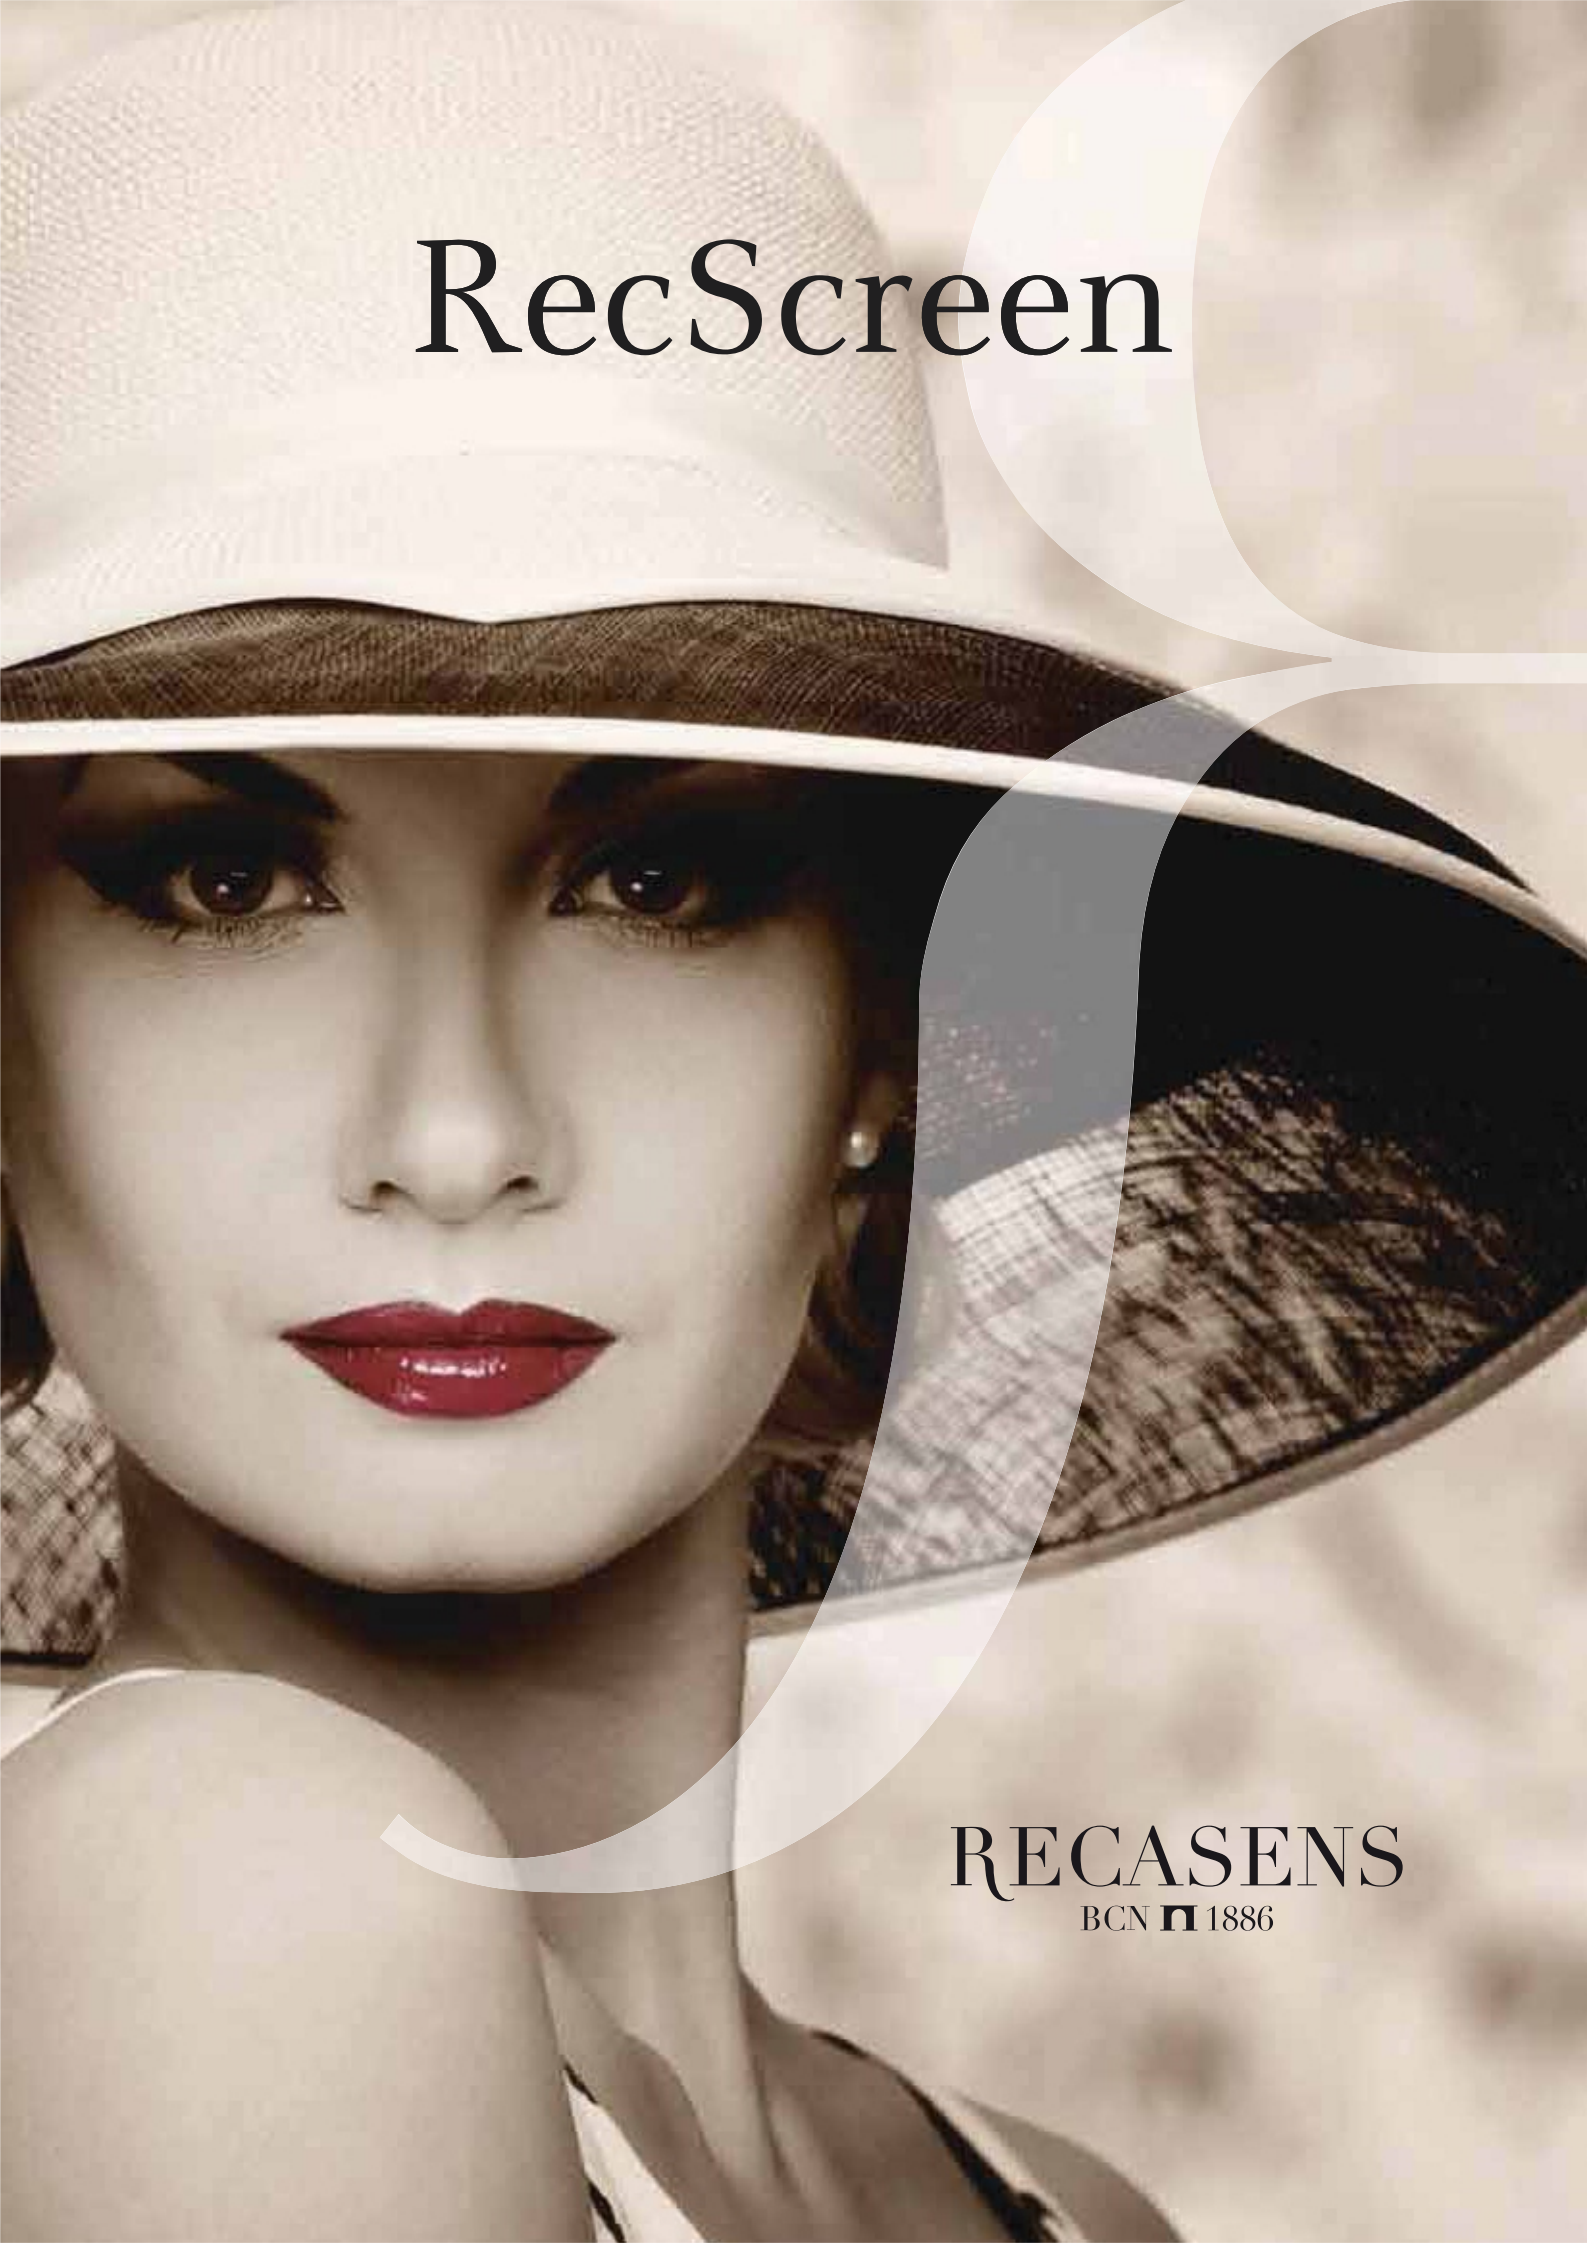

RecScreen

RECASENS
BCN 1886



RecScreen


4000P



300

RECSCREEN 4000P

Brand	Recscreen 4000P
Composition	22 % Polyester 78 % PVC
Weight	430 g/m ² ±5 %
Width	300 cm ±0.5 %
Thickness	0,51 mm
Openess factor	1 % aprox.
Finish	Anti-bacterial. Lead free
Fire Resistance	CLASE I (UNE-EN 13773:2003) M1 - M2
Tensile Strength Warp	165 daN ±5 %
Tensile Strength Weft	130 daN ±5 %
Tear Strength Warp	8 daN ±10 %
Tear Strength Weft	8 daN ±10 %
Thermal Stability	-30 °C / +70 °C
Standard Roll Length	25 m




RecScreen
4000P



000
Blanco-Blanco



002
Blanco-Sable




004
Blanco-Perla




307
Negro-Bronce



300
Negro




RecScreen
5000P

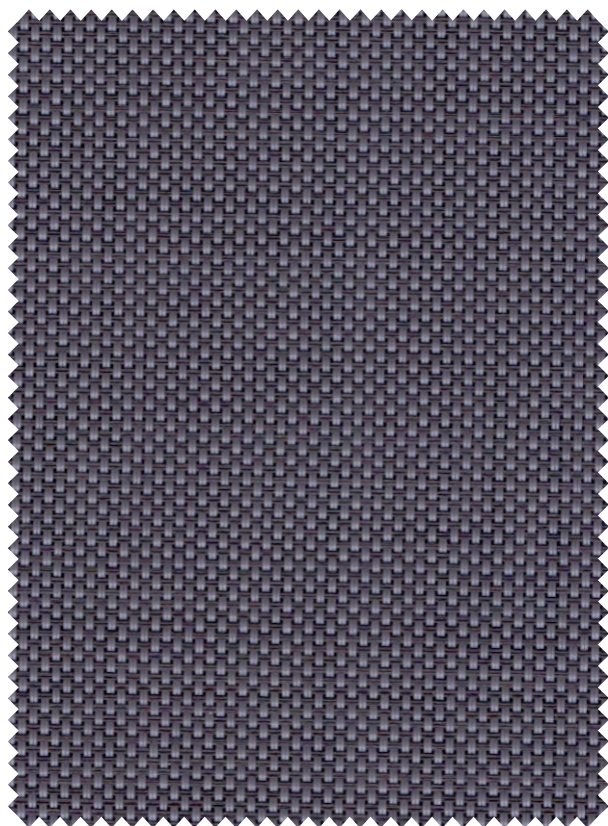


305

RECSCREEN 5000P


Brand	Recscreen 5000P
Composition	15 % Polyester 85 % PVC
Weight	500 g/m ² ±5 %
Width	300 cm ±0.5 %
Thickness	0,65 mm
Openess factor	5.5 % aprox.
Finish	Anti-bacterial. Lead free
Fire Resistance	CLASE I (UNE-EN 13773:2003) M1 - M2
Tensile Strength Warp	95 daN ±5 %
Tensile Strength Weft	95 daN ±5 %
Tear Strength Warp	5.5 daN ±10 %
Tear Strength Weft	5.5 daN ±10 %
Thermal Stability	-30 °C / +70 °C
Standard Roll Length	25 m




RecScreen
5000P




000
Blanco-Blanco




002
Blanco-Sable



004
Blanco-Perla



005
Blanco-Gris Oscuro



305
Negro-Gris Oscuro



300
Negro